

LANGFORD

DIRECT

Constructionline

STANDARD SPECIFICATION Permeable Paving Solution

Trailflex is a low cost, environmentally friendly and completely SuDs compliant permeable paving flexible up to 90°.

Fully compliant with Sustainable Urban Drainage System (SuDS), and BREEAM accredited, Trailflex is a low-cost porous paving surface that will not clog and requires virtually no maintenance. Providing fast and efficient drainage of rainwater the unrivalled porosity can drain up to 80,000 litres per square metre per hour replenishing groundwater and allowing surrounding trees and plants to thrive.

The one-part cold poured system consists of recycled car tyres

and stone bound with our specially developed resin creating one of the greenest paving solutions on the market today.

Fast to install, Trailflex can be trafficked in under 24 hours and it's straight-line loading of up to 17 tonnes makes for an extremely robust system suitable for almost any paving application in town or country.*

*Subject to ground conditions & weight. Check with technical for advice.

ADVANTAGES

Flexible permeable paving - Flexible to 90°, totally porous and clog resistant, forming a low maintenance paving surface

Unrivalled porosity - A highly effective soakaway efficiently managing up to 80,000 litres per square metre per hour

Impervious to tree root intrusion - The adaptable surface removes the risk of root intrusion and subsequent cracking

SuDs compliant - 360 Degree attenuation and BBA approved system

Fast installation and curing - Areas can be trafficked in under 24 hours after completion

3 - TYRES RECYCLED PER METRE²

Trailflex recycles up to 3 tyres for every square metre laid and can help offset your carbon footprint.* Contact us to find out more.

* This specification is based on normal good practice for flexible surfacing and does not absolve the specifier on designing a construction suitable for the expected traffic and ground conditions pertaining to a given site.



20 - YEAR GUARANTEE & 10 - YEAR POROSITY GUARANTEE


Trailflex allows small particles of dirt and grit to agitate through ensuring the surface remains permeable. This allows us to offer a 10 year no clog guarantee.





LANGFORD

- DIRECT -

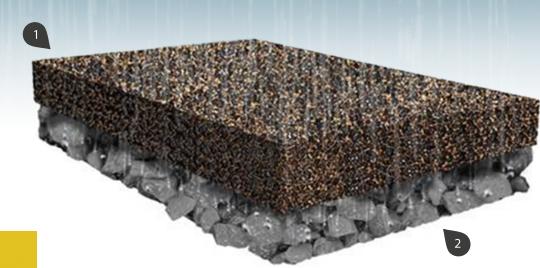



Trailflex Porous Paving 35-50mm - An innovative surface comprised of resin bound recycled tyres and aggregate. Used as a fully permeable and eco-friendly alternative to macadam or concrete surfacing.



MOT Type 3 Sub-Base 50-200mm (Type 1X) (4-20mm graded)*- Clean, compacted angular stone with little to no fines.* Acts as an effective reservoir storing water until it can be absorbed back into the ground.

*Sub-base laid by others. May also be substituted with locally available econdary or recycled aggregates which comply with the above description

MAINTENANCE

continual porosity.

freeze/thaw process.

Trailflex allows small fines/grit to agitate

through the surface as the area is used.

This produces a hostile environment for

weeds and seedlings and ensures

Allowing expansion and contraction

temperatures such as frost and ice which

may otherwise cause damage during the

Trailflex is unaffected by low

SPECIFICATION ADVICE

Typical groundwork specifications

Speed of cure

Car parks/driveways 200mm MOT Type 3 (Type 1X) aggregate* Footpaths (Urban) 50/200mm MOT Type 3 (Type 1X) aggregate* Forest/Parks 50/200mm MOT Type 3 (Type 1X) aggregate* or laid directly on to the existing ground using Terram. (Subject to ground conditions & weight. Please check with technical for advice.)

4 - 16 hours (Weather dependant)

35-50mm - Trailflex Porous PavingTypical construction50-200mm Prepared Base - Type 3 aggregate (Type 1X)

*Clean, Angular stone with little to no fines 4-20mm

LANGFORD DIRECT LTD

Piccadilly House, 49 Piccadilly Gardens, Manchester, M1 2AP

0330 900 2288

info@langforddirect.co.uk www.langforddirect.co.uk









© Langford Direct Ltd 2020